INSTALLATION INSTRUCTION FOR FIXTURE# 4491-298
READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

ASSEMBLY THE FIXTURE (FIG. 1)

1. Shut off the power supply at the fuse box or circuit breaker. Remove the old fixture from ceiling, including the old cross bar.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Assemble the tube (G) together using the nipple (H) well.
4. Put the decorative arm (I) onto the stem (J), fix it in place by threading the bottom end of the tube (G) on.
5. Thread the swivel (F) onto the top end of nipple (H) tightly.
6. Put the glass shade (N), round plate (L) over the nipple (P) in order and secure with cap nut (K).
7. Put the fabric shade (M) set on the fixture arm well;
8. Thread the bottom end of tube (Q) onto the nipple (O), then put the socket assembly down and protrude the top end of the tube (Q) through the holes on the decorative arm (I), then tighten with nut (R)
9. Install the bulbs in accordance with the fixture's specifications. DO NOT EXCEED THE MAXIMUM WATTAGE RATING!

MOUNTING THE FIXTURE

10. Attach the universal mounting plate (B) to the outlet box using the outlet box screws (A). The side of the mounting bar marked "GND" must face out.
11. Follow the wiring instructions carefully (See Fig.2).
12. Attach the fixture main body onto the universal mounting plate (B) by protruding 2 mounting screws (C) through the mounting holes of the ceiling canopy (D) and secure with ball nut (E).

Wiring (See fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black (HOT) house wire. Connect the white wire from the fixture to the white (Neutral) house wire. Make sure all the wire nuts were secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (Green or Bare Copper) connect fixture's ground wire to it. Other wise attach the bare copper fixture wire to the green ground screw on the mounting bar.
2. Tuck the wire connections neatly into the ceiling junction box.

Your installation is now complete. Turn on the power supply of the junction box to test the fixture.

Fig.1

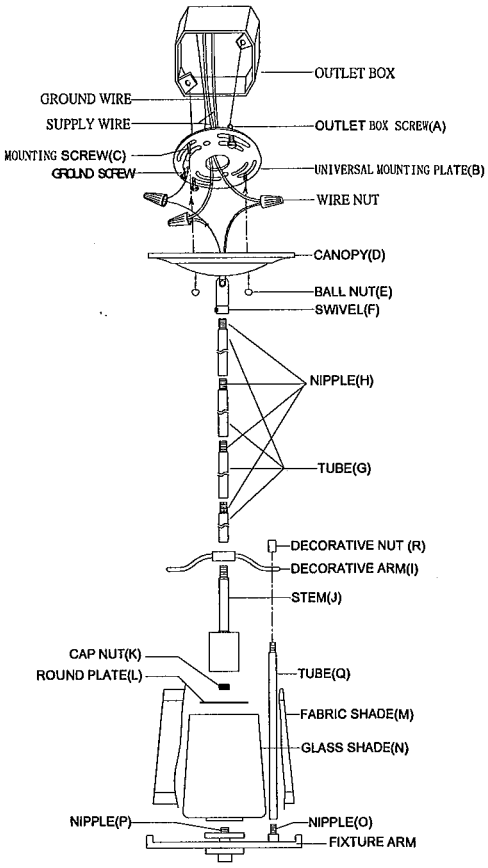

Fig .2

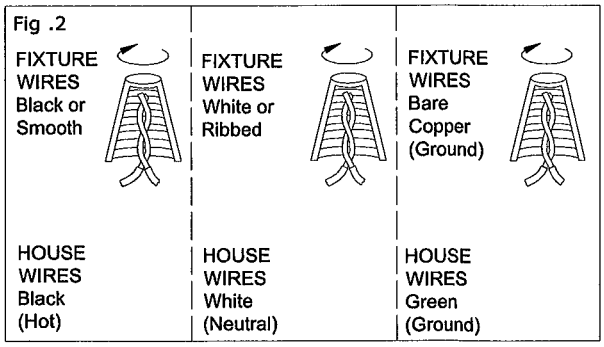
FIXTURE WIRES Black or Smooth
FIXTURE WIRES White or Ribbed
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Black (Hot)
HOUSE WIRES White (Neutral)
HOUSE WIRES Green (Ground)

UL LISTED

american lighting association